


Silnostěnné profily

ocelové uzavřené s obdelníkovým průřezem

DIN 59 411:78

Mezinárodní norma: EN 10 219:97

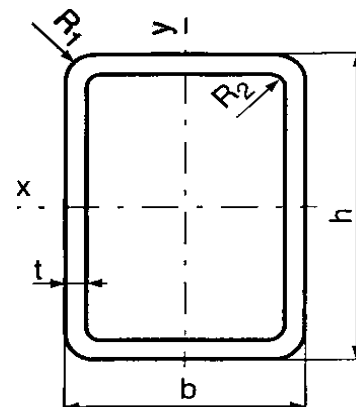

Rozměry			Hmotnost [kg/m]	Rozměry			Hmotnost [kg/m]
H [mm]	B [mm]	T [mm]		H [mm]	B [mm]	T [mm]	
40	30	4	3,57	100	60	4	9,222
50	30	4	4,198			5	11,269
50	40	4	4,826			6	13,212
60	30	4	4,826	100	80	4	10,478
60	40	4	5,454			5	12,839
		5	6,559			6	15,096
70	30	4	5,454	110	50	4	9,222
70	40	4	6,082			5	11,269
		5	7,344			6	13,212
70	50	4	6,71	120	40	4	9,222
		5	8,129			5	11,269
		6	9,444			6	13,212
70	60	4	7,338	120	60	4	10,478
		5	8,914			5	12,839
80	30	4	6,082			6	15,096
80	40	4	6,71	120	80	4	11,734
		5	8,129			5	14,409
		6	9,444			6	16,98
80	50	4	7,338	120	100	8	21,814
		5	8,914			4	12,99
		6	10,386			5	15,979
80	60	4	7,966	120	100	6	18,864
		5	9,699			8	24,326
		6	11,328			4	10,478
80	70	4	8,594	130	50	5	12,839
		5	10,484			6	15,096
90	30	4	6,71	140	60	4	11,734
		5	8,129			5	14,409
90	50	4	7,966			6	16,98
		5	9,699	140	70	4	12,362
6	11,328	5	15,194				
90	70	4	9,222			6	17,922
		5	11,269	140	80	4	12,99
100	40	4	7,966			5	15,979
		5	9,699			6	18,864
		6	11,328	8	24,326		
100	50	4	8,594				
		5	10,484				
		6	12,27				